## <u>NOTES: UNLESS OTHERWISE SPECIFIED</u>

- ALL DIMENSIONS ARE IN INCHES.
  AREA DRAIN BODY MATERIAL: 12GA STAINLESS STEEL T316
  AREA DRAIN BODY MATERIAL: 12GA STAINLESS STEEL T316
  SPECIFYING ENGINEER IS RESPONSIBLE FOR CONCRETE ENCASEMENT
  AND REINFORCING BASED UPON APPLICATION AND LOCAL CODES.
  REFER TO https://info.slotdrainsystems.com/installresources FOR
  INSTALLATION INSTRUCTIONS.

CRETE FLOORING (±FFL)
PER ENGINEER DETAILS

REV

DESCRIPTION


0


INITIAL RELEASE - RO


UPDATED WITH GLOBAL DRAIN TEMPLATE

8/21/2024 DK 10/10/2023 DK

ΒY

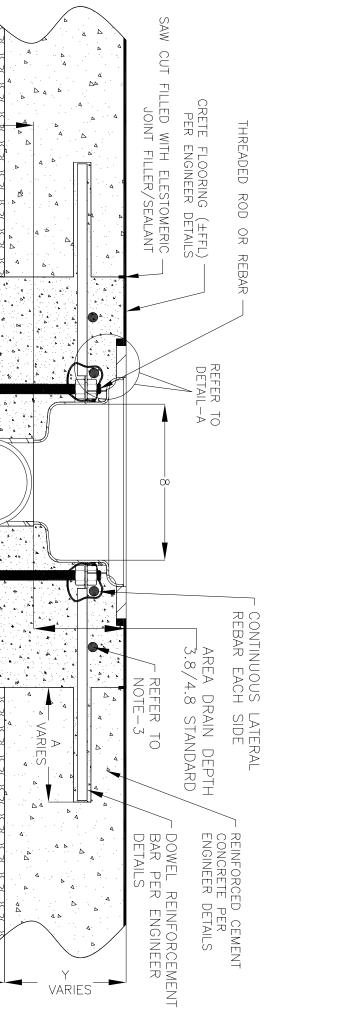

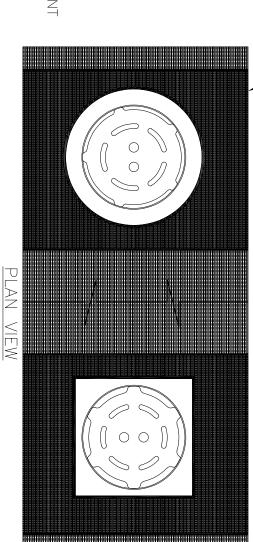

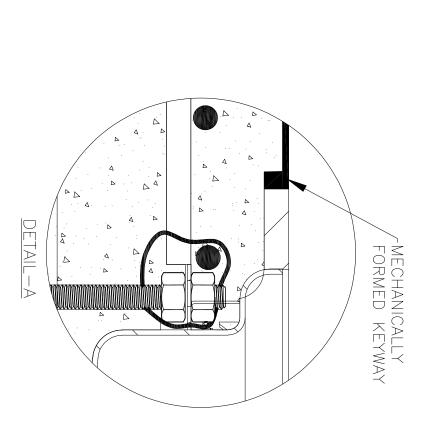

Z VARIES

FOOD SAFE ROUND AREA DRAIN INSTALLATION DETAILS

4X SLAB THICKNESS 24.0 MINIMUM

2.0 - 3.0 -

COMPACTED GRAVEL FILL

MUD SLAB/PLAIN CEMENT CONCRETE

DWG NO. FOOD SAFE ROUND SHALLOW AREA DRAIN DRAWING TITLE IN-FSAD-SH-100-R1 CRETE FLOOR-RETROFIT INSTALLATION Ш  $\bigcap$ I Z O **BAL DRAIN**  $\vdash$ SCALE 0 () | | 9 REV.

S

ALL DRAWINGS ARE THE EXCLUSIVE PROPERTY OF SLOT DRAIN SYSTEMS. ANY REPRODUCTION IN PART OR IN WHOLE IS PROHIBITED WITHOUT PROPER CONSENT.

|size |B