

SPECIFICATIONS

GENERAL:

The Running Trap is a stainless steel accessory to be used in areas of drainage to prevent sewer gas from entering a facility. It is recommended to be used with all FoodSafe Catch Basins side/horizontal outlet connections.


MATERIALS:

- T304 or T316 Stainless Steel

INSTALLATION:

The Running Trap shall be installed in accordance with the manufacturer's installation instructions and recommendations.

TYPICAL PROFILE OF A FOODSAFE RUNNING TRAP

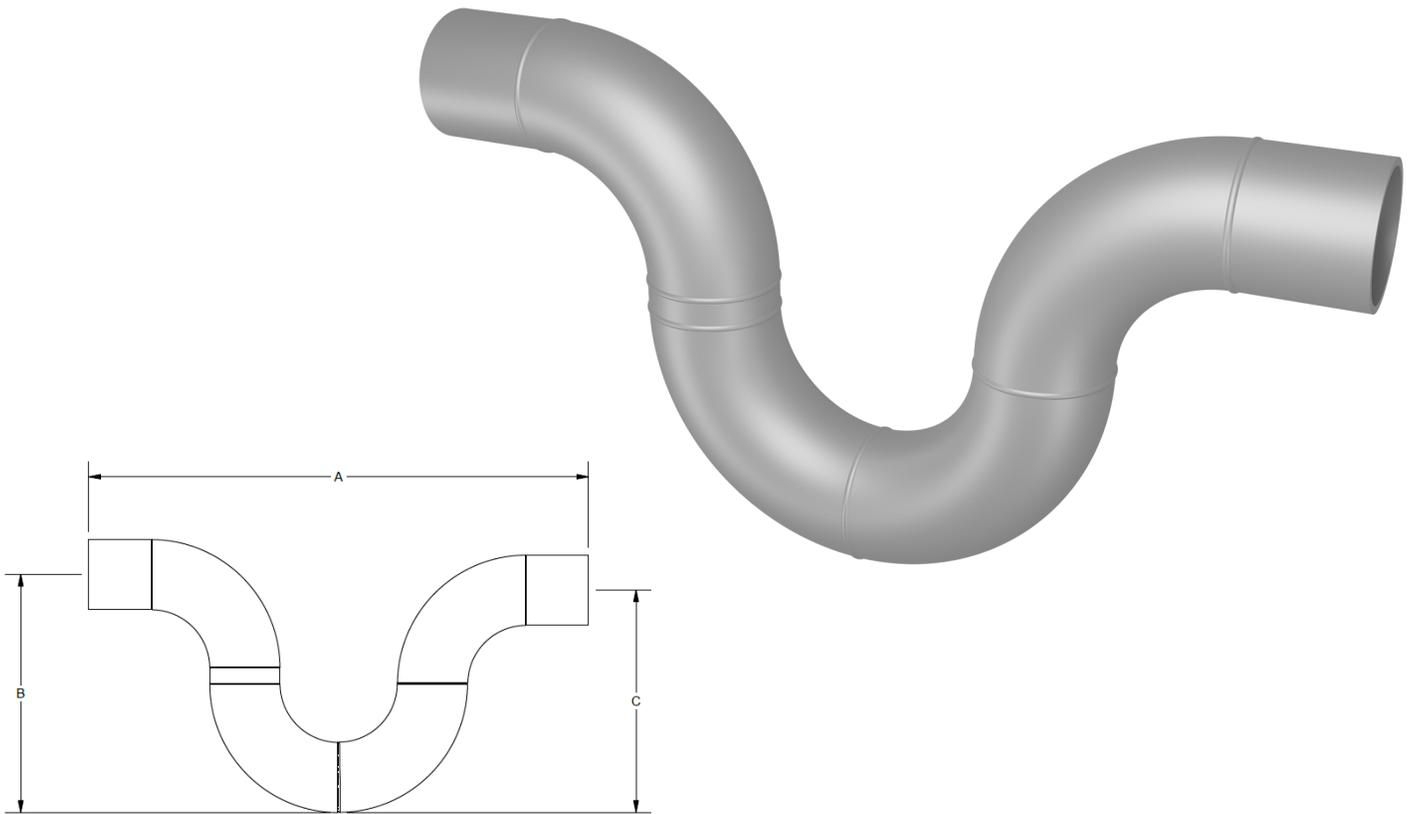

MEASUREMENTS

DESCRIPTION	PART NO.	PIPE SCHEDULE	A [IN]	B [IN]	B [IN]
RUNTRAP WITH 4" PIPE, SCHEDULE 10	RUNTRAP-54A	10	32	15.25	14.25
RUNTRAP WITH 4" PIPE, SCHEDULE 40	RUNTRAP-54	40	32	15.25	14.25
RUNTRAP WITH 6" PIPE, SCHEDULE 10	RUNTRAP-56A	10	44	22.3125	21.3125
RUNTRAP WITH 6" PIPE, SCHEDULE 40	RUNTRAP-56	40	44	22.3125	21.3125

SPECIFYING ENGINEER IS RESPONSIBLE FOR CONCRETE ENCASEMENT AND REINFORCING BASED UPON APPLICATION AND LOCAL CODES.
FOODSAFE DRAINS RESERVES THE RIGHT TO CHANGE THE PRODUCT AND SPECIFICATIONS WITHOUT NOTICE