

SPECIFICATIONS

GENERAL:

The P-Trap is a stainless steel accessory can be used in areas of drainage to prevent sewer gas from entering a facility. It is recommended to be used with all FoodSafe Catch Basins bottom/vertical outlets.


MATERIALS:

- T304 or T316 Stainless Steel

INSTALLATION:

The FoodSafe P-Trap shall be installed in accordance with the manufacturer's installation instructions and recommendations.

TYPICAL PROFILE OF A FOODSAFE P-TRAP

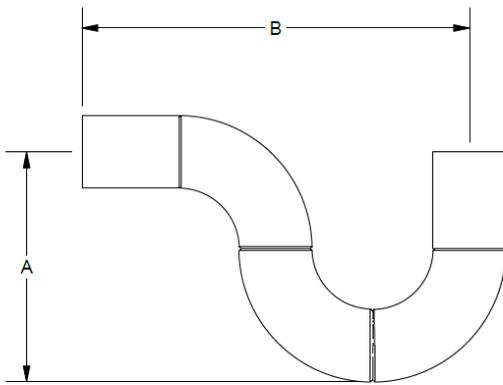

MEASUREMENTS

DESCRIPTION	PART NO.	PIPE SCHEDULE	A [CM]	B [CM]
P-TRAP WITH 4" PIPE, SCHEDULE 10	PTRAP-54A	10	36	61
P-TRAP WITH 4" PIPE, SCHEDULE 40	PTRAP-54	40	36	61
P-TRAP WITH 6" PIPE, SCHEDULE 10	PTRAP-56A	10	54	84
P-TRAP WITH 6" PIPE, SCHEDULE 40	PTRAP-56	40	54	84

SPECIFYING ENGINEER IS RESPONSIBLE FOR CONCRETE ENCASEMENT AND REINFORCING BASED UPON APPLICATION AND LOCAL CODES.
FOODSAFE DRAINS RESERVES THE RIGHT TO CHANGE THE PRODUCT AND SPECIFICATIONS WITHOUT NOTICE